



Super Tile is an easy to assemble interlocking tile that offers a practical way to cover floors. These perforated tiles are ideal for creating a work space that is clean, safe and functional. With a 1/4" hole, they are very easy to clean, as the perforations catch dust and dirt that can be quickly removed with a vacuum cleaner. Safe because it drains water away from your feet.

- Easy to assemble interlocking tiles
- Heavy duty elastomeric PVC construction
- Perforated holes catch dust and dirt while drawing water away from feet
- Matching colored beveled borders available.
- Commercial and residential applications

Product Specifications


Construction:	Molded
Backing:	PVC
Edging:	1" Nitrile Rubber Border
Thickness:	1/4" (6 mm)
Face:	Tread Top- Nitrile Rubber
Testing:	Passes- DOCFFI-70 Pill Test
Durability:	8 ● ● ● ● ● ● ● ● ○ ○
Warranty:	1 year
Order Time:	1 week after signed art proof

SIZES

Standard:
12" x 12" Tiles

Super Tile

12" Interlocking Perforated Tile

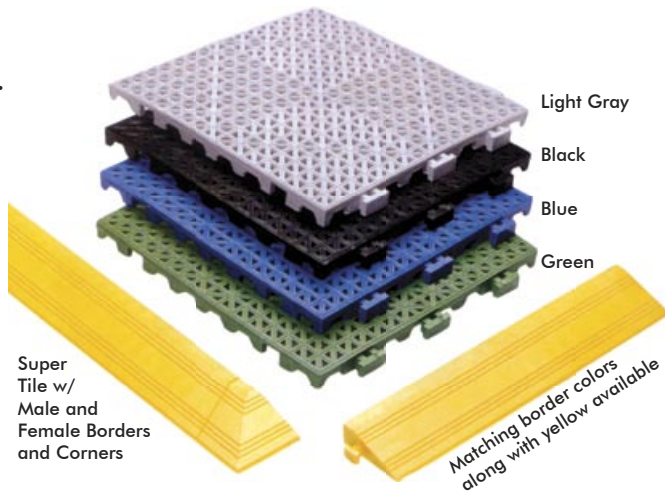

Super Tile in Wet Areas



Super Tile in Entrance

Phone: **800-295-3932**

Fax: 706-937-4425

email: directmat@directmat.com

website: www.directmat.com



Direct Mat

PO Box 1068

Ringgold, GA 30736

Super Tile- 12" Perforated Tiles (Page 14)

SIZE	ACTUAL SIZE	PRODUCT CODE	1	2-9	10-24	25+	WEIGHT
12" x 12"- Black	3/4" Thick x 12" x 12"	STB-12X12	\$ 4.00	\$ 3.80	\$ 3.60	\$ 3.40	1.5
Male Edge- Black	Long	STEDGM	1.40	1.40	1.20	1.20	0.5
Female Edge- Black	Long	STEDGF	1.40	1.40	1.20	1.20	0.5
12" x 12"- Color	3/4" Thick x 12" x 12"	STC-12X12	4.80	4.40	4.40	4.00	1.5
Male Edge- Color	Long	STCEDGM	1.80	1.60	1.60	1.60	0.5
Female Edge- Color	Long	STCEDGF	1.80	1.60	1.60	1.60	0.5
Corner- Black or Color		STCORN	1.00	1.00	1.00	0.80	0.1

Normal Shipping- less than 1 week.

Determining the number tiles and type of edging can be confusing. We recommend that you submit a simple sketch by fax or email a sketch, noting dimensions and where you want edging. We will then fax or email back a breakdown of what will be required as well as pricing. Please call Customer Service if you have any questions.