



Comfort Flow is lighter in weight for easier handling. Fully launderable mat that performs great as an anti-fatigue mat and as a flow-through mat in wet or dry environments.

- Rubber construction makes mat pliable and comfortable
- Grease and oil resistant
- Meets all standards set in the Americans with Disabilities Act

Ideal for use in:

- Kitchens
- Behind Bars
- Food Processing Areas
- Work Stations
- Heavy Industrial Anti-Fatigue
- Machine Shops
- Walk-In Freezers

Product Specifications

Construction: Molded Nitrile Rubber Cushion

Backing: Anti-Fatigue Nitrile Rubber

Edging: Nitrile Rubber Border

Thickness: 7/16" (11mm)

Surface: Nitrile Rubber

Durability: 9 ●●●●●●●●○

Warranty: 2 year

Order Time: 1 week


SIZES

Standard:

2' x 3', 3' x 5', 3' x 9', 4' x 6'

Comfort Flow

7/16" Nitrile Rubber Cushion Anti-Fatigue Mat

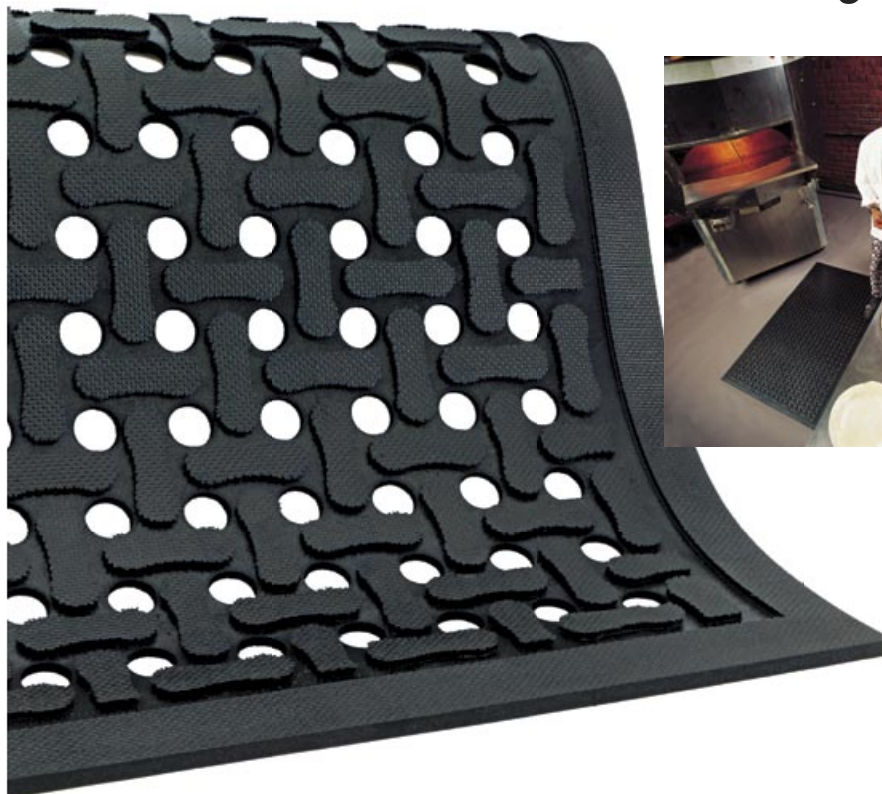

Phone: **800-295-3932**
Fax: 706-937-4425
email: directmat@directmat.com
website: www.directmat.com



Direct Mat
PO Box 1068
Ringgold, GA 30736

PRODUCT DESCRIPTION: COMFORT FLOW

GENERAL SPECIFICATIONS:

SURFACE:	Type:	Nitrile Rubber High Density Closed Cell Foam
BACKING:	Type:	Nitrile Rubber High Density Closed Cell Foam
	Thickness:	3/8"
	Color:	Black
	Durometer:	50 to 55 Shore A

FEATURES:

- Provides superior anti-fatigue properties for employee comfort and ergonomic benefits.
- Constructed of 100% high density, closed-cell Nitrile rubber cushion for maximum resistance to water, oils, greases, chemicals, and animal fats.
- Lightweight, outperforms most thicker, heavier mats and is easy to clean by pressure washing or hosing off.
- Beveled edges around the mat help to minimize trip and fall accidents.
- Slip resistant surface helps to reduce slip and fall accidents. Liquids and debris flow easily through the holes and away from shoes.
- ASTM C1028-96 Static Coefficient of Friction: Dry - .70 Wet - .69
- Anti-static: Electrical Resistance - IBM (Surface to Ground) ASTM F-150 & NFPA 99 Chapter 12 Section 4.1.3.8 (6) (7), 1990. Average Electrical Resistance at 70° F. and 50% Relative Humidity: 5.4×10^6 ohms.
- Passes Flammability Standard DOC-FF-1-70
- Passes AATCC Test Method 134-1991 Electrostatic Propensity of Carpets. Maximum Voltage Negative 0.3 KV.
- U.V. Stable

Phone: **800-295-3932**

Fax: 706-937-4425

email: directmat@directmat.com

website: www.directmat.com



Direct Mat

PO Box 1068

Ringgold, GA 30736

Comfort Flow- 3/8" (Page 13)

SIZE	ACTUAL SIZE	PRODUCT CODE		1-6	7-30	31-49	50+	WEIGHT
2' x 3'	23" x 34"	CF-24X36	\$	39.20	\$ 37.40	\$ 36.20	33.80	6.0
3' x 5'	34" x 56"	CF-36X60		88.80	84.60	82.20	76.40	15.0
3' x 9'	34" x 111"	CF-36X108		143.20	136.60	132.40	123.20	27.0
4' x 6'	43" X 68"	CF-48X72		176.00	167.40	162.40	151.20	24.0

Normal Shipping- less than 2 weeks.

Custom Sizes & Shapes Available.

Wholesale 05/05